

Series 3 Technician's Installation and Service Training Manual

Close Slow/ Close Fast Programming



Warning Electrical Shock Hazard

To prevent serious injury or death always ensure power is disconnected when wiring anything into the ZAP Controller.

To program this function it is necessary to open the case lid of the controller to access the program button and to view the acknowledge light if the beeper module is not installed. (Figure A)

ZAP Commercial controllers have the ability to select the speed of door closure. A slow close may be requested for doors as a safety feature.

To change the programming from normal fast speed close to slow close:

Press and hold the program button. (Figure B)

Release the button after the 7th flash of the ACK LED or beep if the 850 beeper module is installed. (Figure C)

You will then receive two ACK LED flashes or beeps from the 850 Beeper (if installed) will confirm successful programming.

The door is now programmed to close slow.

To revert back to normal speed operations:

Repeat the above process

You will then receive two ACK LED flashes or beeps from the 850 Beeper (if installed) will confirm successful programming.



Figure A

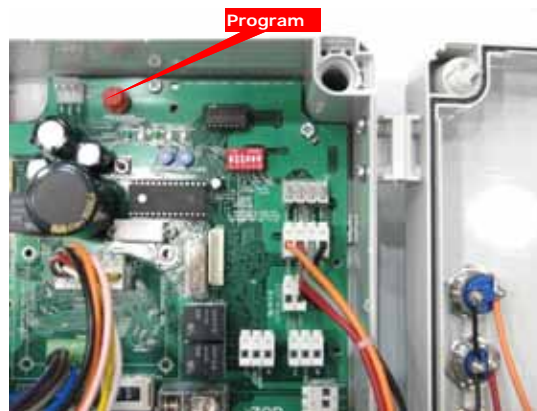


Figure B

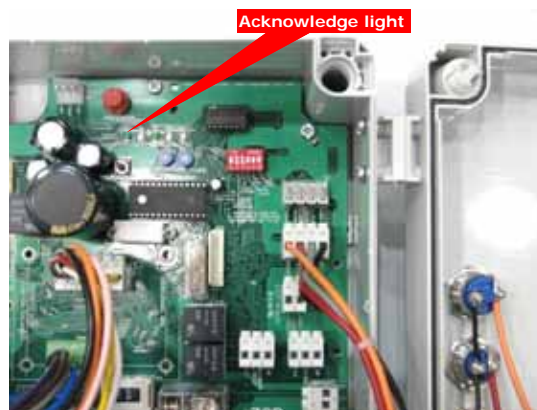


Figure C

ZAP Series 3 Simply Logical

ZAP Controls
100 Waterloo Blvd. Anglesey Business Park, Littleworth Road, Cannock, Staffordshire, England
UK Contact 011-44-154-387-9444 sales@zap-uk.com
USA Contact 931-510-4432 sales@zap-america.com
USA Tech Support 931-510-4432 via telephone or text
Online www.zap-uk.com