

Series 3 Technician's Installation and Service Training Manual

Chamberlain 355LM Receiver Installation and Wiring Instruction



Warning Electrical Shock Hazard
To prevent serious injury or death always ensure power is disconnected when wiring anything into the ZAP Controller.

Materials required
Chamberlain 355LM receiver, appropriate Chamberlain transmitter, 16-20 awg 3 conductor cable.

Tools required
Small technicians slotted screwdriver

Isolate the power supply before wiring any device into a ZAP Controller.

It is feasible to mount the Chamberlain 355LM receiver inside the case lid of the ZAP Controller. Ensure it is positioned as shown in (Figure A). You may secure the receiver in place using double sided tape.

All wiring for the radio receiver onto the ZAP control board is connected to the radio wiring connections as indicated in (Figure B) and highlighted in red.

Terminal 1 (Common) on the Chamberlain receiver (Figure C) is wired and terminated into the 0V connection on TB9. (Figure D)

If cyclic operation by radio control is desired, terminal 2 (Relay) on the Chamberlain receiver (Figure C) is wired and terminated into the Radio connection on TB9. (Figure E)

If only an open function is required (If use of the auto-close timer is employed, it is recommended that only the open be used), wire terminal 2 of the Chamberlain receiver (Figure C) to the open connection on TB3. (Figure F)

Wire terminal 3 (Radio Power) of the Chamberlain receiver (Figure C) to the 24V Power supply, labeled 24V on TB9. (Figure G)

Inside the receiver, move the output duration jumper from P2 and M to P2 and C. (Figure H)

Restore the power supply and program your receiver per the radio control manufacturer's instructions.



Figure A

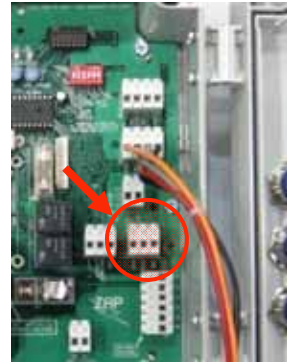


Figure B

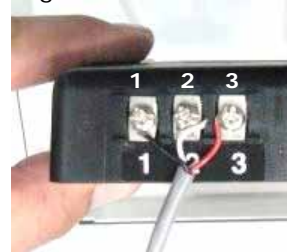


Figure C




Figure D



Figure E

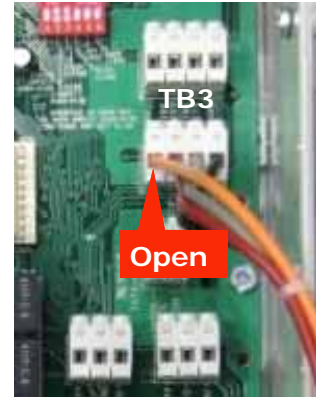


Figure F




Figure G




Figure H

ZAP Series 3 Simply Logical

ZAP Controls
100 Waterloo Blvd. Anglesey Business Park, Littleworth Road, Cannock, Staffordshire, England
UK Contact 011-44-154-387-9444 sales@zap-uk.com
USA Contact 931-510-4432 sales@zap-america.com
USA Tech Support 931-510-4432 via telephone or text
Online www.zap-uk.com