

Series 3 Technician's Installation and Service Training Manual

Single Contact Control Device Trouble Shooting



**Warning Electrical
Shock Hazard**

Cyclic Operation Device

Locate Radio Control accessory terminal (Figure A)

Check to see if wiring and plug on TB9 is securely connected to TB9 and test. If no function, completely disconnect device at the plug terminals

Using a small technicians screwdriver jump the terminals labeled radio and common.

The door should function.

If not, check to ensure case lid is plugged on correctly to TB3

Re-try.

If no operation, consult basic controller trouble shooting.

If door operates and stops with each jump of these two terminals trouble shoot device per it's manufacturers instructions.


Open Only Single Contact Device

Locate TB3on the control board. (Figure B)


Check to see if wiring and plug is securely connected to TB3 and test by pressing the Open button on controller.

If door does not function consult basic controller trouble shooting page.

If door functions OK, disconnect device and troubleshoot per the device manufacturer's instruction.

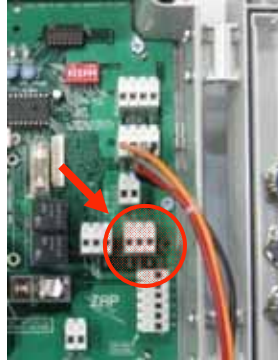

(Figure A)

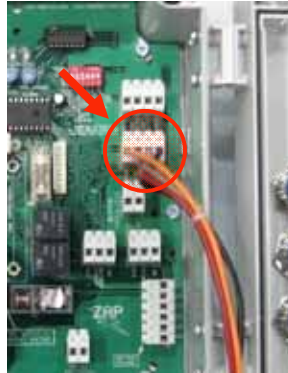

(Figure B)

ZAP Series 3 Simply Logical

ZAP Controls
100 Waterloo Blvd. Anglesey Business Park, Littleworth Road, Cannock, Staffordshire, England
UK Contact 011-44-154-387-9444 sales@zap-uk.com
USA Contact 931-510-4432 sales@zap-america.com
USA Tech Support 931-510-4432 via telephone or text
Online www.zap-uk.com